


BRIK[®]

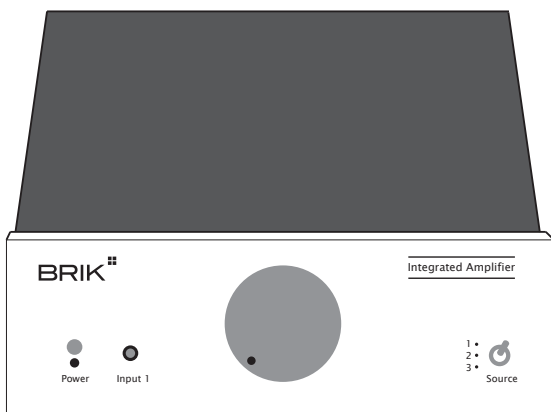

Integrated Amplifier User Manual

BRIK^{II}

Dear User,

Thank you for purchasing BRIK **Integrated Amplifier**.

Please read this User Manual before operating the machine to ensure its best performance and your safety.

Instructions:

Connecting Source

- Connect D/A Converter, Bluetooth Stage, Internet Radio, Phono Stage, CD Player, Mobile Phone, or other line level sources through **Input 1** (3.5mm jack) on the front panel or **Input 2** or **3** on the rear panel.

Connecting Speaker


- Connect speaker cables with 4mm diameter Banana plug, spade connector, or naked wire.
- Highly recommend connecting speakers with 4 ohm and 100 watts output.

Connecting Power

- Before connecting, check the label to ensure the local power supply is compliant, and then connect the low voltage plug from the power supply to the **20V In** socket. Press the Power button on the front panel to turn on the machine and re-press the Power button to turn off.
- Please use 20V/3A power supply or 19V/3.42 power supply for BRIK **Integrated Amplifier**.
- This item shall be connected to a mains socket outlet with a protective earthing connection.

Choosing Source

- Use the switch on the front panel to choose the music source.

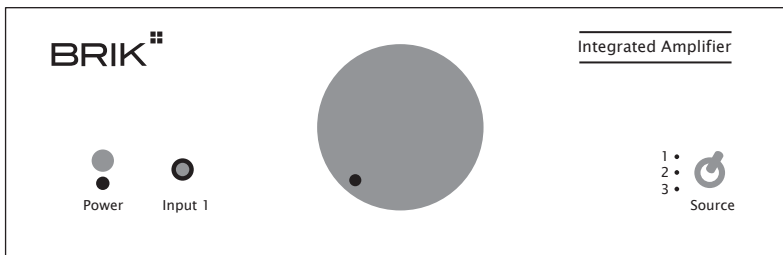

Specifications:

| | |
|-------------------------|---|
| INPUT OPTION | RCA Line Input x 2 3.5 ϕ Line Input x 1 |
| POWER OUTPUT(40HM LOAD) | > 20 W (1KHz THD 0.5 %) > 35 W (THD 10 % Max Output) |
| INPUT SENSITIVITY | 210 mV |
| INPUT IMPEDANCE | 20K OHM |
| DISTORTION | < 0.5 % (1KHz 1W / 4 OHM 20Hz ~ 20K Hz) |
| FREQUENCY RESPONSE | 20 ~ 20K Hz (Volume at Max 1W Output -3dB) |
| SEPARATION | > 60 dB |
| MIN. HUM VOLUME AT MIN. | < 10 mV (20K LPF) |
| S/N | > 75 dB (20K LPF) |
| DIMENSION | W 140 x H 48 x D160 mm |
| WEIGHT | 1100 g |

NOTE


- BRIK **Integrated Amplifier** operates in accordance with its specifications within environment temperature 40 degrees Celsius.

CAUTION

- Only use approved BRIK power supply. The use of other adaptors or supplies could seriously damage this item.
- Place all connecting cables where they are not likely to be walked on or trapped by items placed on them.

WARNING

- Never open the case of this item as this will invalidate the guarantee. There are no user adjustments inside. Please refer all service work to an authorized BRIK agent.
- This item shall not be exposed to dripping or splashing liquid, and that no objects filled with liquids, such as vases, shall be placed on the apparatus.

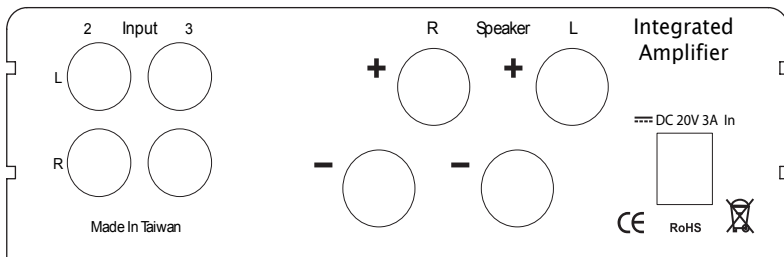

BRIK 
WWW.BRIK-AUDIO.COM

CE  **RoHS**

The information was correct at the time of going to press. The manufacturer reserves the rights to make changes to the technical specification without prior notice.

The manufacturer accepts no responsibility for damage caused by not adhering to these instructions for use. Modification or change to any part of the product by unauthorized persons releases the manufacturer from any liability over and above the lawful rights of the customer.

©BRIK 2011